


This Tabletop Microphone is perfect for teleconferencing applications that demand high-performance audio quality. The low profile and small size makes this mic ideal for conference tables that require minimum-visibility microphones.



Applications

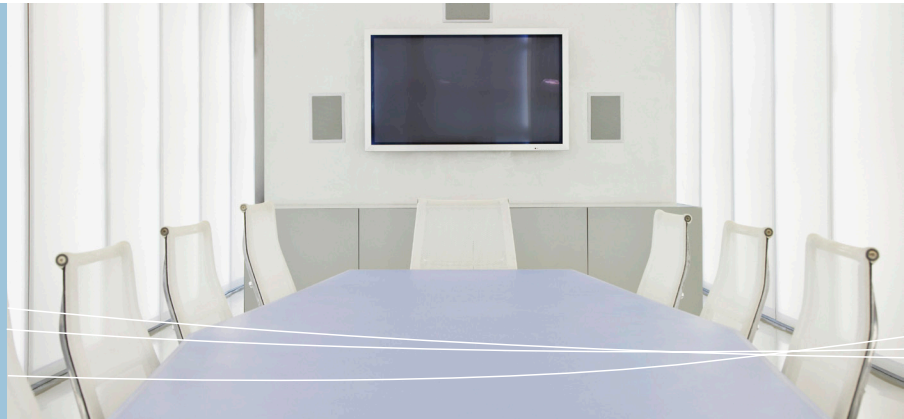

- Conference Rooms
- Home Offices
- Boardrooms
- Training Rooms
- Courtrooms
- Distance Learning Centers
- Convention Centers and Hotels

Features



Unobtrusive Design

- + Very discreet
- + Aesthetically pleasing
- + Designed for built-in applications

Superior Audio Performance

- + Excellent pickup range in omni- or uni-directional model
- + Perfect complement to ClearOne's industry-leading professional conferencing systems

Functional Specifications

Element

Electrets condenser

Polar Pattern

Uni-directional Cardioid

Frequency Response

50Hz to 18 kHz

Sensitivity

-65dB +/- 3dB at 1,000Hz
(odB = 1 microbar)

Output Impedance

250 ohms (balanced)
(replace letters
ohms with horseshoe
symbol)

Output Voltage

9 to 52VDC (phantom power)

Max SPL

141dB (1% THD open circuit)

Signal to Noise Ratio

>65dB (OdB = 1 microbar)

Connector

A3M Type (XLR male)

Cable Length

26.35 1/8 m

Weight

15.7 oz / 60 g (without cable)

Microphone Size WxL (Top View)

2.8" x 3.4" / 70 x 85 mm

Part Number

802-103-161

Delay; adjustable up to 250
ms

Clearone Contacts

North America

Tel: 801-975-7200
Toll Free: 800-945-7730
Sales: 800-707-6994
Fax: 801-977-0087
sales@clearone.com

Europe & Oceania

Tel: +44 (0) 1189 036 053
global@clearone.com

Asia Pacific

Tel: +852 3590 4526
global@clearone.com

Latin America

Tel: 801-974-3621
global@clearone.com

Middle East

Tel: +852 3590 4526
global@clearone.com

Other product names may be registered trademarks of their respective owners who do not necessarily endorse ClearOne or ClearOne's products.
All rights reserved. Information in this document subject to change without notice. © 2013 ClearOne. 802-103-161 Revision 4.0 July 2013.