# ClearOne. Aura

# With **Aura**, Professionals can now **Re-imagine** their **Workspaces** at **Home**

# **Bluetooth Wall Panel**



The Bluetooth Wall Panel enables Bluetooth audio conferencing and streaming from mobile devices to ClearOne's CONVERGE® Huddle audio processor.

# Aura Professional Home Office Solution

Dramatically enhances the audio and video experience for any cloud-based video collaboration application for your professional home office



# **ClearOne**


### **Highlights**

- + Bluetooth pair name can be customized.
- P-Link\* makes wiring easy on systems using the CONVERGE<sup>®</sup> Huddle.
- + Wall-mount design for convenient room access (single-gang electrical box).

- + Bluetooth 3.0 compliant interface supports industry standard profiles for audio.
- + Has great range up to 150 feet (45 meters).
- + FREE COLLABORATE<sup>®</sup> Space lifetime subscription ClearOne's high quality, award winning cloud-based video collaboration application.

## **Aura Professional Home Office Application**

Complete your **Bluetooth Wall Panel** setup by adding other ClearOne Aura products

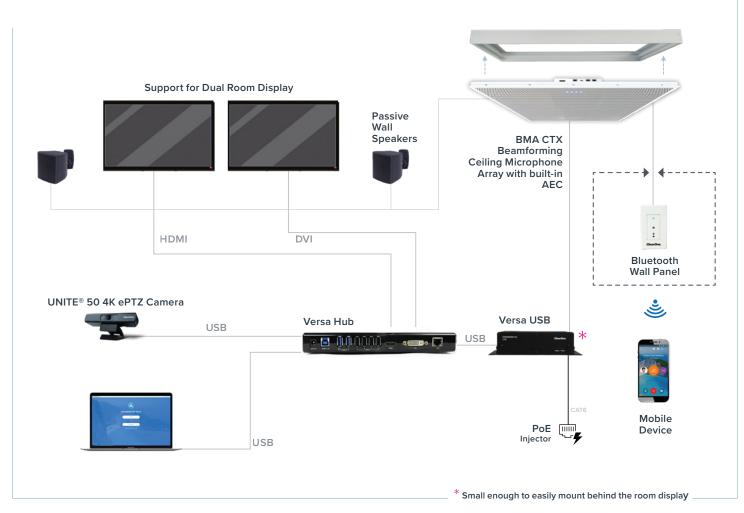

## **ClearOne**

## **Specifications**

+ AUR-3200-303 - Bluetooth Wall Panel

#### **BLUETOOTH WIRELESS TECHNOLOGY**

- + Version: 3.0
- + Mode: Bluetooth classic
- + Supported profiles
- Hands-free profile v.1.6 (HFP)
  Distribution profiles v.1.5 (A2DP, AVRCP)
- + Supported codec
- Default SBC (44.1 kHz) do not list on datasheet, other upon request. Hands-free profile v.1.6 (HFP)
- + Wireless performance
  - Frequency Band: 2390 MHz to 2483.5 MHz
  - Transmit Power: +6.5 dBm
  - Receiver Sensitivity: -90 dBm3
  - Wireless Range: Up to 150 feet (45 meters)

#### INDICATORS AND MOMENTARY SWITCH

- + LED
- Blinking blue Ready to pair
- Solid blue Paired
- + Toggle switch
- Press to reset Bluetooth break Bluetooth connection and set into pairing mode

#### P-LINK IN (PROPRIETARY NETWORK)

- + RJ45: Cat5e, Cat6, P-Link In only
- + Cable Length: 200 ft (test up to 250 ft)

#### **POWER CONSUMPTION**

- + P-Link In, RJ45
- + 2.24 Watts

#### THERMAL

+ 7.64 BTU/Hr

#### **OPERATING TEMPERATURE**

+ 14° F/-10° C to 104° F/40° C

#### DIMENSIONS

+ 1.7" x 4.4" x 1.6" (44 mm x 112.5 mm x 40 mm)

#### WEIGHT

- + Product weight: .19 lb (88 g)
- + Shipping weight: .35 lb (.16 kg)

#### COMPLIANCE

This device complies with part 15 of the FCC Rules Operation is subject to the condition that this device does not cause harmful interference.

- + FCC ID: QOQWT32I
- + IC: 5123A-BGTWT32I
- + MIC ID: 209-J00089
- + KCC: MSIP-CRM-BGT-WT32i

### Sales & Inquiries -

#### Headquarters

5225 Wiley Post Way Suite 500 Salt Lake City, UT 84116

#### Headquarters US: +1.801.975.7200 International: +1.801.975.7200

#### Aura Sales

US: +1.888.HEY.AURA International: +1.801.975.7200 aurasales@clearone.com

#### Aura Tech Support

US: +1.888.HEY.AURA International: +1.801.975.7200 auratechsupport@clearone.com

Other product names and logos may be registered trademarks of their respective owners who do not necessarily endorse ClearOne or ClearOne's products. All rights reserved. Information in this document subject to change without notice. DST-0159-001 Rev2.0 20201117 ©2020 ClearOne.

#### 1.975.7200 Intern auras