

**ClearOne** Aura™

With **Aura**,  
Professionals can  
now **Re-imagine**  
their **Workspaces**  
at **Home**



## UNITE® 200 PTZ Camera



Best-in-class professional-grade PTZ camera with USB, HDMI, and IP connections make it ideal for conferencing as well as video streaming. Delivers Full HD 1080p quality, 12x optical zoom, and wide-angle video capture with advanced noise reduction.

### Aura Professional Home Office Solution

Dramatically enhances the audio and video experience for any **cloud-based video collaboration** application for your **professional home office**




## Highlights

- ✦ Full HD 1080p60 video and 12x optical zoom for high video quality, regardless of where the camera is installed in your professional home office.
- ✦ Control the camera's functions via IR remote, RS-232, or UVC protocol.
- ✦ H.264/H.265 streaming and line-in interface to stream audio along with video over IP.
- ✦ Super-high SNR with advanced 2D and 3D noise reduction.
- ✦ Compatible with popular applications such as COLLABORATE® Space, Microsoft® Teams, WebEx™, Zoom™, Google® Meeti™, and more.
- ✦ FREE COLLABORATE® Space lifetime subscription — ClearOne's high quality, award winning cloud-based video collaboration application.
- ✦ Simple USB 3.0/2.0 compatibility with UVC and UAC protocol support.

## Aura Professional Home Office Application

Complete your **UNITE® 200 PTZ Camera** setup by adding other ClearOne Aura products

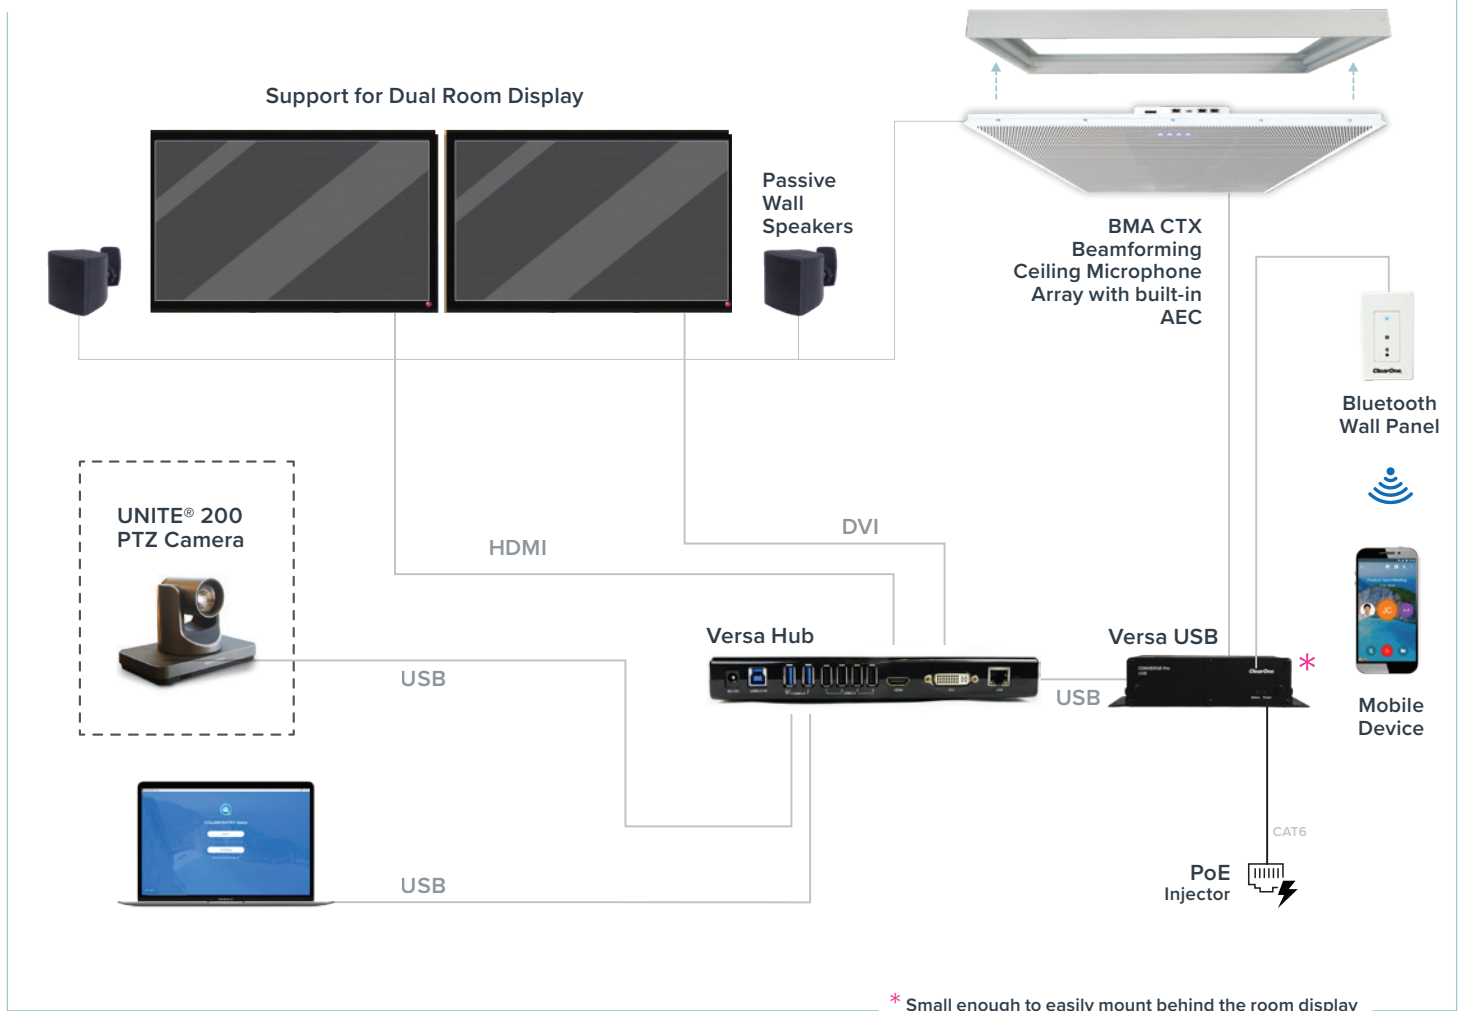

## Specifications

- + AUR-2100-003 UNITE® 200 PTZ Camera

### INCLUDES

- + Free COLLABORATE® Space lifetime subscription

### VIDEO

- + VIDEO FORMATS: 1080p60, 1080p50, 71080i60, 1080i50, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
- + Sensor: 1/2.7 inch, CMOS
- + Effective pixel: 2.07M
- + Scanning mode: Progressive
- + Lens: 12x, f3.5 mm – 42.3 mm, f1.8 – f2.8
- + Minimal illumination: 0.05 lux @ (f1.8, AGC ON)
- + Shutter: 1/30 S – 1/10000 S
- + White balance: Auto, indoor, outdoor, One-push, manual
- + Backlight Compensation: Supported
- + Digital Noise Reduction: 2D & 3D digital noise reduction
- + Video S/N: ≥55dB
- + Horizontal angle of view: 72.5° – 6.9°
- + Vertical angle of view: 44.8° – 3.9°
- + Horizontal rotation range: ±170°
- + Vertical rotation range: -30° – +90°
- + Pan speed range: 1.7° – 100°/S
- + Tilt speed range: 1.7° – 69.9°/S
- + H & V flip: Supported
- + Image freezing: Supported
- + Number of presets: 255
- + Flexible installation: Stand mount, upside-down mount

### USB FEATURES

- + Operating Systems: Windows 7, Windows 8, Windows 8.1, Windows 10, MAC OS, Linux
- + Color System: YUV 4:2:2
- + USB video communication: UVC 1.0
- + UVC PTZ: Supported

### COMPATIBILITY

- + HD Output: 1 x HDMI: Version 1.3
- + Network Interface: 1 x RJ45: 10 M / 100 M / 1000 M Adaptive Ethernet Port
- + Audio Input: 1-CH 3.5 mm Audio Interface, Line In
- + USB: 1 x USB3.0: type B Female jack 1 x USB2.0: type a Female jack (reserved interface)
- + Communication: 1 x Rs-232 in: 8-Pin Min din, Max distance: 30M, Protocol: VISCA/Pelco-D/Pelco-P 1 x RS-232 Out: 8-Pin Min din, Max distance: 30M, Protocols: VISCA network use Only 1 x RS485: Share with RS232 Out, Max distance: 1200 m, Protocol

### POWER

- + Power Jack: JEITA type (DC In 12 V)
- + Input Voltage: DC 12 V
- + Power Consumption: 12 W (max)

### ENVIRONMENTAL

- + Operating temperature: +14° F–104° F (-10° C–40° C)
- + Storage temperature: -40° F–140° F (-40° C–60° C)

### MECHANICAL

- + Dimensions (W x D x H): 9.45 x 5.67 x 6.30” (240 x 144 x 160 mm)
- + Weight: 3.6 lb (1.65 kg)

### OPTIONAL ACCESSORIES

- + AUR-2100-103 Wall Mount for UNITE® 200
- + AUR-2100-203 Ceiling Mount for UNITE® 200
- + AUR-2100-002 USB 3.0 cable

## Sales & Inquiries

### Headquarters

5225 Wiley Post Way  
Suite 500  
Salt Lake City, UT 84116

### Headquarters

US: +1.801.975.7200  
International: +1.801.975.7200

### Aura Sales

US: +1.888.HEY.AURA  
International: +1.801.975.7200  
aurasales@clearone.com

### Aura Tech Support

US: +1.888.HEY.AURA  
International: +1.801.975.7200  
auratechsupport@clearone.com