

# With Aura, Professionals can now Re-imagine their Workspaces at Home

# Versa 150



Plug-and-play system including a UNITE® 150 12x optical zoom ePTZ camera and CHAT® 150 USB speakerphone. Brings ClearOne's HDConference<sup>™</sup> audio technology and HD video to your home office.

# Aura Professional Home Office Solution

Dramatically enhances the audio and video experience for any cloud-based video collaboration application for your professional home office




# **ClearOne**

## **Highlights**

- + CHAT<sup>®</sup> 150 USB speakerphone with advanced audio processing for a rich conferencing experience.
- + UNITE<sup>®</sup> 150 1080p30 PTZ camera with 12x optical zoom for high video quality no matter where the camera is installed in your home office.
- Central USB hub for connecting to a network, dual displays, camera, audio endpoints, network, and other peripherals.
- Compatible with popular applications such as COLLABORATE<sup>®</sup> Space, Microsoft<sup>®</sup> Teams, WebEx<sup>™</sup>, Zoom<sup>™</sup>, Google<sup>®</sup> Meet<sup>™</sup>, and more.
- + FREE COLLABORATE<sup>®</sup> Space lifetime subscription ClearOne's high quality, award winning cloud-based video collaboration application.

## **Aura Professional Home Office Application**

Complete your Versa 150 setup by adding other ClearOne Aura products

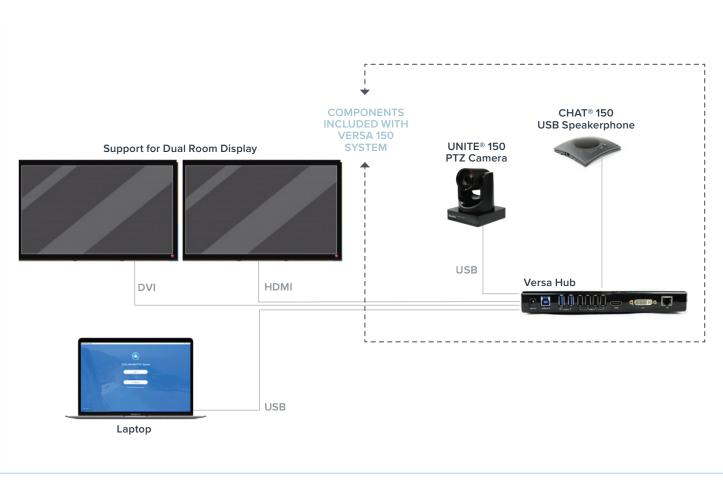



## **Specifications**

+ AUR-3001-150 COLLABORATE® Versa 150

#### INCLUDES

- + AUR-156-200 CHAT® 150 USB Speakerphone
- + AUR-2100-004 UNITE® 150 PTZ HD camera
- + AUR-3001-100 COLLABORATE® Versa Hub
- + Camera remote control
- + Two-year warranty with support and maintenance
- + Free COLLABORATE® Space lifetime subscription

#### **CHAT 150® USB SPEAKERPHONE**

- + Speaker
- Bandwidth: 190 Hz 20 kHz
- Max output level: 85 dB SPL @ 1 meter
- + Microphone
- Bandwidth: 100 Hz 12 kHz
- + Full-Duplex Acoustic Echo Cancellation (AEC)
- + Noise Cancellation (NC)
- + Automatic Level Control (ALC)
- + COMPATIBILITY
  - Windows 7 or higher
- MAC OS
- + INPUT/OUTPUT INTERFACE
- USB Mini B port
- Version 2.0 compatible
- Keyed RJ-45 (8 conductor)
- + CONTROLS
  - Volume up
- Volume down
- Microphone mute
- + POWER
  - USB-powered
- 5 VDC @ 500 mA Maximum
- + ENVIRONMENTAL
  - Operating temperature: 41° F 104° F (5° C 40° C)
- + MECHANICAL
  - Dimensions: (W x D x H): 7.4 x 7.4 x 1.8" (188 x 188 x 46 mm)
  - Weight: 1.17 lb (0.53 kg)

#### **UNITE® 150 PTZ HD CAMERA**

- + VIDEO FORMATS: 1080p30, 1080p25, 720p30, 720p25
- + Sensor: 1/2.7 inch, CMOS
- + Effective pixel: 2.07M
- Scanning mode: Progressive
- + Lens : 12x, f3.5 mm 42.3 mm, f1.8 f2.8
- + Minimal illumination: 0.5 lux @ (f1.8, AGC ON)
- + Shutter: 1/30S 1/10000 S
- + White balance: Auto, Indoor, Outdoor, One Push, Manual
- + Backlight compensation: Supported
- + Digital Noise Reduction: 2D & 3D
- + Video S/N: ≥55 dB
- + Horizontal angle of view: 72.5° 6.9°
- Vertical angle of view: 44.8° 3.9°
- + Horizontal rotation range: ±170°
- Vertical rotation range: -30° +90°
- + Pan speed range: 1.7° 100°/S
- Tilt speed range: 1.7° 69.9°/S
- + H & V FLIP: Supported
- + Image freezing: Supported
- + Number of presets: 255
- + Installation: Stand Mount, upside-down mount
- + INPUT/OUTPUT INTERFACE
- Audio interface: 1-CH 3.5 mm Audio Interface, Line In
- USB interface: 1 x USB3.0: type B Female jack
- Communication: 1 x Rs-232 in : 8-Pin Min din, Max distance: 30m, Protocols: VISCA/Pelco-D/Pelco-P
- 1x RS-232 Out: 8-Pin Min din, Max distance: 30M, Protocols: visca network use Only
- + COMPATIBILITY
- Operating Systems: Windows 7, Windows 8, Windows 8.1, Windows 10, MAC OS, Linux
- Color System: YUV 4:2:2
- USB 2.0: 720P30 maximum NOTE: Use of USB 2.0 downgrades video quality. ClearOne does not recommend using USB 2.0 extenders.
- USB Video Communication: UVC 1.0 UVC 1.5
- Audio on USB: Supported
- UVC PTZ: Supported

# **ClearOne**

### **Specifications**

#### + POWER

- Power jack: JEITA type (DC In 12 V)
- Input voltage: DC 12
- Current consumption: 1.0 A (max)
- Power consumption: 12 W (max)

#### + ENVIRONMENTAL

- Operating temperature:  $+14^{\circ}$  F $-104^{\circ}$  F ( $-10^{\circ}$  C $-40^{\circ}$  C)
- Storage temperature:  $-40^{\circ}$  F  $140^{\circ}$  F  $(-40^{\circ}$  C  $60^{\circ}$  C)
- MTBF: >30000h

#### + MECHANICAL

- Dimensions (W x D x H): 5.67 x 5.67 x 6.61" (144 x 144 x 168 mm)
- Weight: 2.0 lb (0.91 kg)

#### **VERSA HUB**

- + 1x USB 3.0 (Type-B) for laptop (requires display link driver on laptop)
- + 2x USB 3.0 (Type-A) for UNITE camera & CHAT Speakerphone
- + 4x USB 2.0 ports
- + 1x HDMI out
- + 1x DVI out

#### SYSTEM REQUIREMENTS

- + Windows 7 or higher
- + MAC OS 10.7 or higher

#### MECHANICAL

- + Weight: 11.25 lb (5.1 kg)
- + Dimensions: 21 x 11.5 x 14.5"
- (533 x 292 x 368 mm)

### Sales & Inquiries -

#### Headquarters

5225 Wiley Post Way Suite 500 Salt Lake City, UT 84116

#### Headquarters US: +1.801.975.7200 International: +1.801.975.7200

#### Aura Sales

US: +1.888.HEY.AURA International: +1.801.975.7200 aurasales@clearone.com

#### Aura Tech Support

US: +1.888.HEY.AURA International: +1.801.975.7200 auratechsupport@clearone.com

Other product names and logos may be registered trademarks of their respective owners who do not necessarily endorse ClearOne or ClearOne's products. All rights reserved. Information in this document subject to change without notice. DST-0058-001 Rev1.4 20200930 ©2020 ClearOne.