


ClearOne® Aura™

With **Aura**,
Professionals can
now **Re-imagine**
their **Workspaces**
at **Home**



Xceed™ BMA

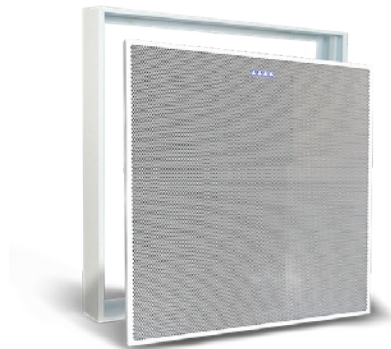

Features a USB audio-enabled Beamforming Ceiling Microphone Array that brings cost-effective and superb conferencing audio to your professional home office.

Aura Professional
Home Office Solution

Dramatically enhances the audio and video experience for any **cloud-based video collaboration** application for your **professional home office**




Highlights

- ✦ BMA CTX with built-in AEC and adaptive steering (think of it as smart switching) provides the same impeccable room coverage as the BMA CT.
- ✦ 24-in or 600 mm microphone array with a variety of mounting options.
- ✦ Includes 2x10 Watt power amps to drive passive wall speakers.
- ✦ Connect laptop or room PC to the BMA CTX directly through the USB port on the Versa USB. The included 50-foot CAT6 cable connects the Versa USB to the BMA CTX.
- ✦ Add ClearOne's Bluetooth Wall Panel to enable mobile devices to join the conference wirelessly. The Bluetooth Wall Panel makes this system smart speaker ready. Supports Alexa, Cortana, Google Home, and Siri.
- ✦ Compatible with popular applications such as COLLABORATE® Space, Microsoft® Teams, WebEx™, Zoom™, Google® Meet™, and more.
- ✦ FREE COLLABORATE® Space lifetime subscription — ClearOne's high quality award-winning cloud-based video collaboration application.
- ✦ Complete your system with any UNITE® conferencing camera.
- ✦ Add a Versa Hub for single-cable connection for cloud-based collaboration.
- ✦ Delivering superb coverage and quality at an unbeatable price, the Xceed BMA is easy to install and easy to use.

Aura Professional Home Office Application

Complete your **Xceed BMA** setup by adding other ClearOne Aura products

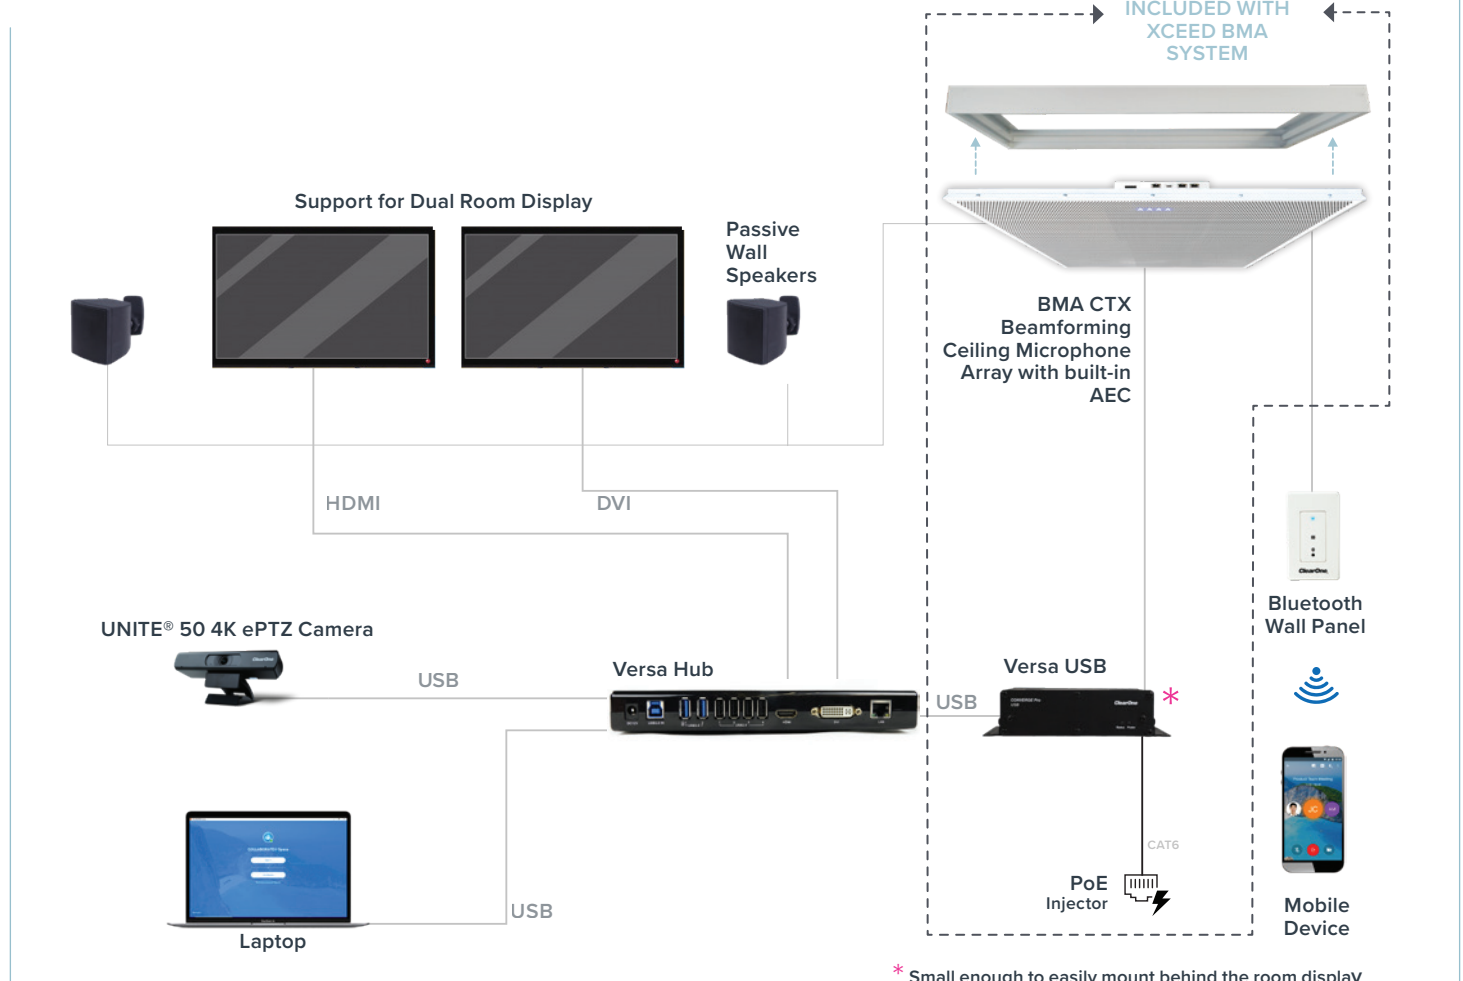

Specifications

- ✦ AUR-3200-010 Xceed BMA Room
- ✦ AUR-3200-010-I Xceed BMA Room Intl

INCLUDES

- ✦ AUR-3200-010 Xceed BMA (North America):
 - 910-3200-205 BMA CTX 24-in
 - AUR-3200-210 BMA Surface-Mount Kit 24in
- ✦ AUR-3200-010-I Xceed BMA Intl (International):
 - 910-3200-205-I BMA CTX 600mm
 - AUR-3200-210-I BMA Surface-Mount Kit 600mm
- ✦ All include:
 - 910-3200-305 Versa USB
 - AUR-3200-202 PoE+ Power Supply Kit
 - AUR-3200-204-50 RJ45 CAT6 Cable – 50'
 - Free COLLABORATE® Space lifetime subscription

BMA CTX

- ✦ Number of Beams: Two patterns, either 5 or 6 beams
- ✦ Polar Pattern: Custom
- ✦ Frequency Response: 150 Hz – 16 kHz, +/- 3 dB
- ✦ Dynamic Range: 150 Hz – 16 kHz, > 70 dB
- ✦ AMPLIFIER OUTPUT
 - Type: 5.08mm black header, Phoenix/Euroblock type
 - Audio: 2 channels
 - Output power: 2x10 W Max, 8Ω load*
 - Frequency Response: 20 Hz – 22 kHz @ +10 dBu, +/- 0.5 dB
- ✦ POWER SELECTION SWITCH
 - Type: Slide Switch
 - Toggle towards P-Link to power device by P-Link
 - Toggle towards PoE to power device by PoE Injector
- ✦ MOUNTING
 - Ceiling mount (24" or 600 mm)
- ✦ MECHANICAL
 - 24" BMA CTX: + 23.72 x 23.72 x 2.13" (602.5 x 602.5 x 54.1 mm)
 - 600 mm BMA CTX: + 592.5 x 592.5 x 54.1 mm (23.33 x 23.33 x 2.13")
 - Weight: 7.7 lb (3.5 kg)

VERSA USB

- ✦ Port Type: USB-B connector
- ✦ Audio: Digital audio, 2 x 2 bidirectional channels
- ✦ Sample Rate: 48 kHz
- ✦ Sample Bit Depth: 24 Bit
- ✦ Compatibility: USB 2.0, USB 3.0
- ✦ USB Cable Distance: 16' (5 m)
- ✦ Compatible: Windows & MAC OS devices
- ✦ P-LINK PERIPHERAL BUS
 - Ports Type: RJ-45 (Cat5e or Cat6)
 - P-Link In & Out: Proprietary peripheral bus
 - PoE 802.3af Mode B, Midspan
 - Power on "spare pairs" 4,5 and 7,8
 - Cable: Solid-core 24 AWG, factory-terminated Cat5e or Cat 6 cable
 - Distance: Up to 200' (60 m)
- ✦ POWER SELECTION SWITCH
 - Type: Slide Switch
 - Toggle towards P-Link to power device by P-Link
 - Toggle towards PoE to power device by PoE Injector
- ✦ PoE IN PORT
 - Port Type: RJ-45 port
 - PoE: 802.3af or 802.3at PoE/PoE+ injector input
- ✦ MOUNTING
 - Rack-shelf mount
 - Under-the-table mount
 - Wall mount behind display
- ✦ MECHANICAL
 - Without rack ears: 5.5 x 1.6 x 4.1" (144 x 42 x 103 mm)
 - With rack ears: 6.8 x 1.7 x 4.1" (172 x 43 x 103 mm)
 - Weight: 0.88 lb (0.4 kg)

Specifications

POWER

- + Power Type: PoE/PoE+
- + Port Type: RJ-45
- + PoE In/P-Link In: 802.3af or 802.3at PoE/PoE+
- + Power Source: PoE Injector or equivalent
- + PoE: IEEE 802.3at compliant devices providing 56V and 640 mA (36 W).
- + P-Link In - Mode B
- + Power Consumption:
 - 100-240 VAC, 50/60 Hz, 3 Watts Typical
 - 38 W at max power 1kHz (2 x 10 W)

ENVIRONMENTAL

- + Thermal: 130 BTU/Hr at max power
- + Operating Temperature: 14° F - 104° F (-10° C - 40° C) ambient temperature

OPTIONAL CLEARONE PERIPHERALS

- + AUR-3200-303 Bluetooth Wall Panel
- + 910-3200-305 Versa USB
- + AUR-151-010-B Passive Wall Speakers
- + AUR-3200-204-50 RJ45 CAT6 Cable – 50'
- + 910-3200-702-30 USB 3.0 Cable – 33'
- + 693-153-050 Speaker Cable – 50'

Sales & Inquiries

Headquarters

5225 Wiley Post Way
Suite 500
Salt Lake City, UT 84116

Headquarters

US: +1.801.975.7200
International: +1.801.975.7200

Aura Sales

US: +1.888.HEY.AURA
International: +1.801.975.7200
aurasales@clearone.com

Aura Tech Support

US: +1.888.HEY.AURA
International: +1.801.975.7200
auratechsupport@clearone.com