ClearOne. Aura

With Aura,
Professionals can
now Re-imagine
their Workspaces
at Home



Ceiling Microphone



Easily installed and affordable, featuring three wide-range microphones mounted together into a single unit array. Provides the rich sound of three individual unidirectional microphones while maintaining full 360-degree coverage.

Aura Professional Home Office Solution

Dramatically enhances the audio and video experience for any cloud-based video collaboration application for your professional home office






Highlights

- Easily installed and affordable popular tri-element ceiling microphone array. Gets microphones off the table, while maintaining speech quality and intelligibility.
- → Enhances any conferencing application which demands high-quality audio, delivering exceptional audio quality.
- Provides rich sound with three wide-range mics mounted together into a single-unit array, maintaining 360-degree coverage from 15 to up to 20 ft.

- + Superb audio quality with wide bandwidth, high SNR, and 100% shielding against RF interference allows use for multiple applications.
- + Perfect match for the CONVERGE® Huddle DSP.
- + Includes drop down cables for 12" and 24" to match various ceiling heights.
- + Sleek, unobtrusive design (3.3" x 1.5") comes in White or Black color options.
- + FREE COLLABORATE® Space lifetime subscription ClearOne's high quality, award winning cloud-based video collaboration application.

Aura Professional Home Office Application

Complete your Ceiling Microphone setup by adding other ClearOne Aura products

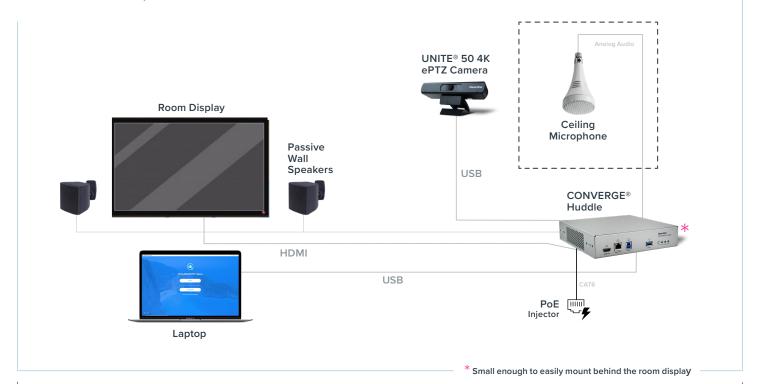



Specifications

+ AUR-001-013-W White Ceiling Microphone Array kit

INCLUDES

- + Each kit includes:
- Microphone Array Module
- 12 and 24 inch drop-down cables
- 25 foot RJ45 plenum-rated CAT5e cable
- RJ45 receptacle to mixer adapter cable
- Free COLLABORATE® Space lifetime subscription

ACOUSTIC CHARACTERISTICS

+ Polar Pattern: Cardioid

+ Dynamic Range: 80 dB, 1 kHz @ max SPL + Signal/Noise Ratio: 60 dBA, 1 kHz @ 1 Pa

+ Frequency Response: 100 Hz - 12 kHz

+ Sensitivity: 114 mV/Pa

ELECTRICAL CHARACTERISTICS

- Element: Fixed-charge back plate permanently polarized condenser
- + Phantom Power Requirement: 12-52 vdc, 2 mA typical Impedance: 200 Ω

CABLES INCLUDED

- + 12-inch and 24-inch 4-pin mini-XLR drop-down cable
- + 25-foot RJ45 male to RJ45 male CAT5e
- + RJ45 receptacle to mixer adapter cable

MOUNTING

- + Ceiling pass-through mounting assembly
- + Max cable length from array to Huddle: 300 ft (91.44 m)

ENVIRONMENTAL

+ -4° F to 158° F (-20° C to 70° C)

MECHANICAL

- + Dimensions (W x D xH): 3.3 x 1.5" (83.8 x 38.1 mm)
- + Weight: 2.2 lb (1 kg)

Sales & Inquiries -

Headquarters

5225 Wiley Post Way Suite 500 Salt Lake City, UT 84116 Headquarters

US: +1.801.975.7200 International: +1.801.975.7200 Aura Sales

US: +1.888.HEY.AURA International: +1.801.975.7200 aurasales@clearone.com Aura Tech Support

US: +1.888.HEY.AURA International: +1.801.975.7200 auratechsupport@clearone.com