

CONVERGE® Pro 2 128SRD




CONVERGE Pro 2 is the industry's most advanced professional audio DSP platform for conferencing and sound reinforcement applications. It outperforms in any size room, audio environment, and application.

- > Built-in Native Camera Tracking for ClearOne Unite cameras and many 3rd party cameras using RS-232 and Ethernet VISCA over IP.
- > 12 mic/line inputs.
- > Built-in Dante™ for networked audio.
- > DARE™ feedback elimination.
- > Standalone and daisy-chained system.
- > Expansion bus "C-Link" with 150 channels.
- > Flexible control options include Dialer app for Windows, Mac, iOS, Android, Touch Panel Controller with tabletop and wall mount options, 3rd party control modules for integrated systems.
- > Reduced footprint and power consumption.
- > Acoustic Intelligence for better audio.
- > Advanced microphone gating.
- > Configure and manage entire system with New CONSOLE® software, Auto-discovery of devices, MatrixView™ for entire system, FlowView™ for visualized audio signal paths and System monitoring and troubleshooting.
- > "P-Link" bus to connect peripheral devices.
- > Stack up units up to 144 Mic/Line inputs.



Everything you need

The 128SRD model mixer has 12 inputs, 8 outputs, USB audio; GPIO, RS-232, IP control interfaces; and P-Link and C-Link expansion buses; and Dante™ digital audio interfaces.

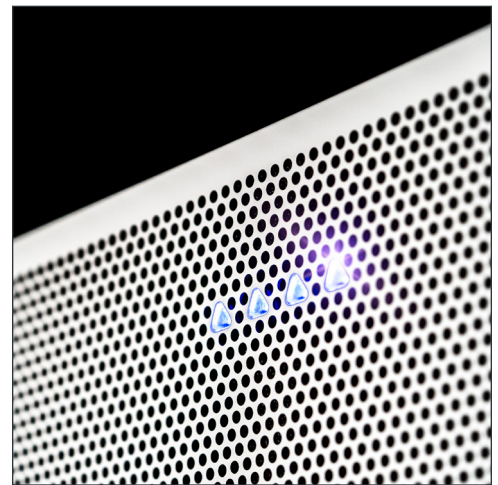

Easy Integration

Daisy-chain the CONVERGE Pro 2 with the BMA 360, DIALOG® 20 2-Channel Wireless Microphone System, and other peripheral devices through P-Link.

APPLICATIONS

- PC-based Conferencing
- Unified Communications
- Sound Reinforcement
- Video codec-based Conferencing

WORKSPACES

- Convention Centers
- Lecture Halls
- Courtrooms
- Transportation Hubs
- Auditoriums
- Training Rooms
- Houses of Worship

It's All About the Architecture!®

CONVERGE® Pro 2 128SRD

| | |
|--|---|
| PART NUMBER | • 910-3200-101-D |
| CAMERA TRACKING | <ul style="list-style-type: none">• Supported Cameras: Unite 150, Unite 200, Unite 160, Unite 260 (One Camera per DSP)• Communication Protocol: VISCA• Communication options: Serial (RS-232) or Ethernet (VISCA over IP) |
| MIC/LINE INPUTS & OUTPUTS | <ul style="list-style-type: none">• Inputs: Balanced audio inputs, 3.81 mm Black color Phoenix/Euroblock type male header, Push-on miniterminal block• Outputs: Balanced audio outputs, 3.81 mm Black color Phoenix/Euroblock type male header, Push-on miniterminal block• Frequency Response: 20 Hz – 22 kHz @ +4 dBu, +/- 0.5 dBu• EIN (Equivalent Input Noise): 20 kHz BW, max gain, $R_s = 150 \Omega$, -126 dBu• THD + N (Total Harmonic Distortion + Noise):<ul style="list-style-type: none">- 20 Hz – 22 kHz @ +4 dBu, line level, 0.006 %- 20 Hz – 22 kHz @ -56 dBu, mic level, < 0.04 %• Dynamic Range: 20 Hz – 20 kHz @ 0 dB, >105 dB• Crosstalk (Mic/Line): Channel to Channel, stimulus at 20 dBu to receptor at -56 dBu, 1 kHz, < -98 dB• Input Impedance: Balanced (line to ground), 2, 2 kΩ, 1 %• Nominal Input Level: Adjustable -56 dB to 0 dB, 7 dB step coarse gain• Maximum Input Level: -65 dBu to 20 dBu• Phantom Power: 48V, Impedance 6.81 kΩ• Output Impedance: Balanced (line to ground), 95 Ω, 1 %• Output Level: 0 dBu (Nominal), 20 dBu (Max), -40 dBu (Selectable) |
| ETHERNET | <ul style="list-style-type: none">• Port Type: RJ-45, 10/100 Mbps Ethernet Network, Auto Negotiation• IP address: IPv4 (IPv6 upgradeable through future s/w, f/w upgrade) |
| DANTE™ and AES67 AUDIO | <ul style="list-style-type: none">• Port Type: RJ-45 Gigabit Ethernet connectors for Primary and Secondary Ports• Audio: Digital Audio, 16 x 16 bidirectional channels• Sample Rate: 48 kHz / 96 kHz• Sample Bit Depth: 24-Bit• AES67 Mode: Enabled through Dante controller software |
| C-LINK EXPANSION BUS | <ul style="list-style-type: none">• Ports Type: RJ-45 (Cat 5e or Cat 6)• C-Link In & Out: Proprietary Expansion Bus• Audio: 150 Expansion channels• Cable: Solid core, factory terminated Cat 5e or 6 cable• Distance: Up to 80 ' (24 m) |
| P-LINK PERIPHERAL BUS | <ul style="list-style-type: none">• Ports Type: RJ-45 (Cat 5e or Cat 6)• P-Link In & Out: Proprietary Peripheral Bus• PoE In:<ul style="list-style-type: none">- P-Link In Port- PoE 802.3 af Mode B, Midspan- Power on "spare pairs" 4, 5 and 7, 8- Input voltage range: 48 V to 56 V• Audio: Up to 3 DIALOG 20 Wireless Receiver units + Up to 3 USB Expander units + Up to 3 GPIO Expander units• Cable: Solid core, factory terminated Cat 5e or 6 cable• Distance: Up to 200 ' (60 m) |

CONVERGE® Pro 2 128SRD

| | |
|--------------------------|--|
| RS-232 | <ul style="list-style-type: none">• Port Type: DB9 Female• Settings: 9600/19200/38400/57600/115200 Baud; Serial Echo; Flow Control• Support: Serial commands |
| GPIO | <ul style="list-style-type: none">• Port Type: 5.08 mm Green color Phoenix/Euroblock type male header• Support: Control, Status, Variable Voltage Control• Power Pin: 5 VDC @ 350 mA Power Source• Pin 1 to 4:<ul style="list-style-type: none">- Open Collector Outputs: 40 VDC @ 250 mA- Active Outputs (Source/Sink): 5 VDC @25 mA- Logic Inputs: 40.2 kΩ pull up- Variable Voltage Control Inputs: 5 VDC max• Ground Pin: GND |
| USB CONTROL | <ul style="list-style-type: none">• Port Type: USB-B connector• Location: Front Panel• Compatible: USB 2.0, USB 3.0 |
| LEDs | <ul style="list-style-type: none">• Location: Front Panel• Status LED:<ul style="list-style-type: none">- Off: Unit still initializing- Blue - Fast Blinking: Stack Syncing in progress- Blue - Slow Blinking: Unit not configured- Blue - Solid: Configured unit- Red - Fast Blinking: Stack Sync error• Locate LED: Blue - Blinking: Unit "Locate" command received• Power LED: Blue - Solid: Unit is powered on |
| TOUCH SENSOR | <ul style="list-style-type: none">• Sensor Type: Capacitive Touch Button• Location: Front Panel |
| POWER & THERMAL | <ul style="list-style-type: none">• Port Type: AC Inlet• Mains Voltage: 100-240 VAC, 50/60 Hz• Power Consumption: 50 Watts Typical• Thermal: 170 BTU/Hr Typical• Operating Temperature: 14 °F (-10 °C) to 104 °F (40 °C) Ambient Temperature |
| DIMENSION & WEIGHT | <ul style="list-style-type: none">• RU size: 1 RU• Width x Depth x Height:<ul style="list-style-type: none">- Without rack-ears: 17 x 10.7 x 1.7 " (431 x 273 x 44 mm)- With rack-ears: 19 x 10.7 x 1.7 " (483 x 273 x 44 mm)• Unit Weight: 9.3 lbs (4.2 Kg) (Approximately)• Shipping Weight: 13.8 lbs (6.3 Kg) (Approximately) |

CONVERGE® Pro 2 128SRD

- PACKAGE
- Power Cord: 6 ' (1.8 m), Grounded, Qty 1
 - Input Connectors: Terminal Block Connector, 4 Position (Orange), Qty 12
 - Output Connectors: Terminal Block Connector, 3 Position (Black), Qty 8
 - GPIO Connector: Terminal Block Connector, 6 Position (Green), Qty 1
 - C-Link Cable: RJ-45 To RJ-45 Cable, 18 " (45.7 cm), Qty 1
 - USB Cable: USB Type A to Type B, 6 ' (1.8 m), Qty 1
 - Rack Ears: Pre-installed, Qty 2
 - Screw/Washer Kit: Rack Decor, Qty 4

SALES AND INQUIRIES

| Headquarters | US & Canada | International | Sales | Tech Support |
|--|----------------------|----------------------|--|---|
| 5225 Wiley Post Way Suite 500 Salt Lake City, UT 84116 | Tel: +1.801.975.7200 | Tel: +1.801.975.7200 | Tel: +1.801.975.7200 sales@clearone.com | Tel: +1.801.974.3760 audiotechsupport@clearone.com |